

## GX9 & GX12

### Commercial AC window fans



## Models

### GX9

Ref. 89994AW

Two speed high performance 9" axial fan | Operated by a remote switch (not supplied) | Intake or extract (reversible with optional controller) | Suitable for single and sealed double glazing windows and panels up to 25mm

### GXC9

Ref. 89995AW

Single speed high performance 9" axial fan | Operated by an integral pullcord | Suitable for single and sealed double glazing windows and panels up to 25mm

### GX12

Ref. 90012AW

Two speed high performance 9" axial fan | Operated by a remote switch (not supplied) | Intake or extract (reversible with optional controller) | Suitable for sealed double glazing windows and panels up to 25mm

### GX9 (SAUDI)

Ref. 90906AW


## The Range

GX9 and GX12 commercial window are easy to install with the longer ladder strips supplied, ensuring a secure and watertight seal against the glass. Safety finger guard is integrated into the housing and window grille. A tamper-proof positive plug and socket assembly provides a means of isolation for service access. Suitable for installation in single and sealed double glazed windows (up to 25mm).

Both sizes are reversible and feature totally enclosed external rotor motors providing constant volume outputs. Sealed for life maintenance free bearings ensure suitability for running at any angle. When not in use, the silent electro-thermal shutter cassette closes silently against backdraughts.

## Key Features

- 9" and 12" models
- GX electro-thermal shutter or GXC pullcord mechanical (9") model options
- GX models are reversible and speed controllable (controller required)
- Sickle bladed impellers provide a constant volume output
- 220-240V 50/60Hz

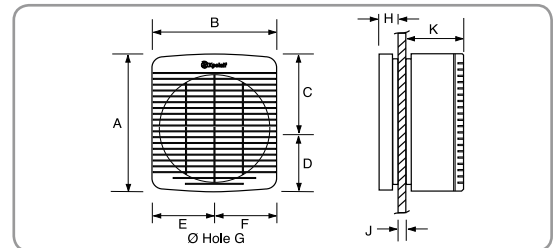

Dimensions (mm)

Model	A	B	C	D	E
GX9	312	294	165	147	147
GX12	408	380	216	192	190

Dimensions (mm)

Model	F	G	H	J	K
GX9	147	257/266	32	4-35	124
GX12	190	324/330	34	4-35	170

Product Selector	GX9	GXC9	GX12	GX9 (SAUDI)
Reference number	89994AW	89995AW	90012AW	90906AW
Extract performance (FID, m <sup>3</sup> /h)	High 728 Low 618	549	High 1614 Low 1214	-
Extract performance (FID, l/s)	High 202 Low 172	153	High 448 Low 337	-
Extract performance (CFT/min)	High 428 Low 364.4	324.2	High 949.3 Low 159	-
Intake performance (FID, m <sup>3</sup> /h)	High 456 Low 412	-	High 1002 Low 819	-
Intake performance (FID, l/s)	High 127 Low 114	-	High 278 Low 228	-
Intake performance (CFT/min)	High 269.1 Low 241.6	-	High 589 Low 483.1	-
Sound pressure level (dB(A)@3m)	High 50 Low 58	44	High 55 Low 50	-
Electrical power rating (W)	41	32	85	-
Weight (kg)	4	3.9	7.9	-